


Diamond cup grinding wheel

DS 600 S SUPRA

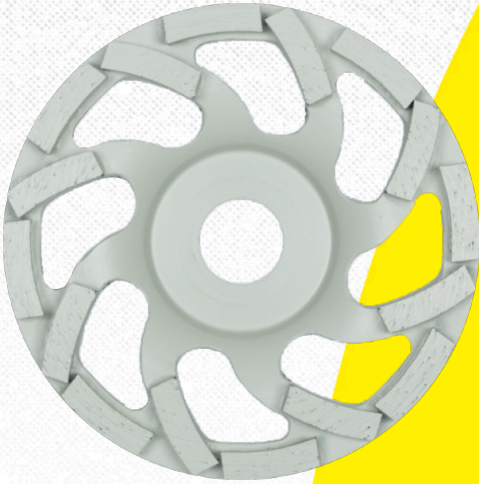

Properties

Design	Brazed
Segmentation	Standard
Aggression	■ ■ ■ ■ ■ □ □
Service life	■ ■ ■ ■ ■ □

Product benefit

Excellent dust extraction thanks to specially designed (fan-shaped) opening - Low weight thanks to lightweight steel plate - Rugged performance and operation with minimum vibrations - M14 adapter available, see DZ 114

Materials

Concrete	●
Firebrick	●
Natural stone	●
Masonry	●
Brickwork	●

Applications

- ▶ Building construction
- ▶ Floor tilers
- ▶ Concrete plants
- ▶ Natural stone businesses

Diameter x Bore in mm	Cup grinding wheel height [mm]	Vmax m/s	Max. RPM	Segment in mm: Number / Width / Height	Packing unit/pcs.	Cat. number
100 x 16 / 22,23	20,5	80 m/s	15300 rpm	16 / 7,2 / 5,5	1	331022
115 x 22,23	20,5	80 m/s	13300 rpm	16 / 7,2 / 5,5	1	331023
125 x 22,23	20,5	80 m/s	12200 rpm	16 / 7,2 / 5,5	1	331024
180 x 22,23	30,5	80 m/s	8500 rpm	24 / 7,8 / 5,5	1	331025

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany
Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186
sales@klingspor.de - www.klingspor.de

