


# Abrasive fibre disc, multibond

## CS 570

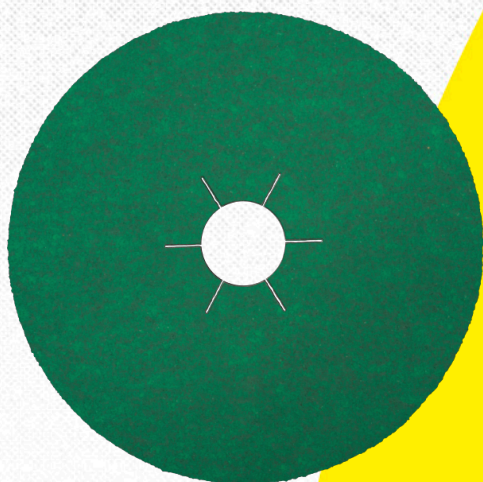

### Properties

Bonding agent	Resin
Grain	Zirconia alumina
Coating	Close

### Product benefit

Self-sharpening effect - High aggressiveness, especially suitable for stainless steel - Increase in performance due to low temperatures - Multibond prevents heat tinting - Especially suitable for use on aluminium

### Application

Stainless steel	●
Aluminium	●
NF metals	●

### Applications

► Stainless steel processing industry

### Available grits:

16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 1000 1200 1500 2000 2500 3000

Diameter x Hole in mm	Hole pattern	grain	Vmax m/s	Max. RPM	type of coat.abras.	bore shape	Packing unit/pcs.	Cat. number
100 x 16	⊙ 10	36	80 m/s	15300 rpm	CS 570	round hole	25	204823
100 x 16	⊙ 10	60	80 m/s	15300 rpm	CS 570	round hole	25	204825
100 x 16	⊙ 10	80	80 m/s	15300 rpm	CS 570	round hole	25	204826
100 x 16	⊙ 10	120	80 m/s	15300 rpm	CS 570	round hole	25	204828
115 x 22	⊗ 30	24	80 m/s	13300 rpm	CS 570	star shaped hole	25	204085
115 x 22	⊗ 30	36	80 m/s	13300 rpm	CS 570	star shaped hole	25	204086

### Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany  
 Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186  
 sales@klingspor.de - www.klingspor.de



Diameter x Hole in mm	Hole pattern	grain	Vmax m/s	Max. RPM	type of coat.abras.	bore shape	Packing unit/pcs.	Cat. number
115 x 22	⊗ 30	50	80 m/s	13300 rpm	CS 570	star shaped hole	25	204087
115 x 22	⊗ 30	60	80 m/s	13300 rpm	CS 570	star shaped hole	25	204088
115 x 22	⊗ 30	80	80 m/s	13300 rpm	CS 570	star shaped hole	25	204089
115 x 22	⊗ 30	100	80 m/s	13300 rpm	CS 570	star shaped hole	25	204090
115 x 22	⊗ 30	120	80 m/s	13300 rpm	CS 570	star shaped hole	25	204091
115 x 22	⊙ 10	36	80 m/s	13300 rpm	CS 570	round hole	25	204797
115 x 22	⊙ 10	60	80 m/s	13300 rpm	CS 570	round hole	25	204799
115 x 22	⊙ 10	80	80 m/s	13300 rpm	CS 570	round hole	25	204800
115 x 22	⊙ 10	120	80 m/s	13300 rpm	CS 570	round hole	25	204802
115 x 22	⊗ 30	40	80 m/s	13300 rpm	CS 570	star shaped hole	25	250258
125 x 22	⊗ 30	24	80 m/s	12200 rpm	CS 570	star shaped hole	25	204092
125 x 22	⊗ 30	36	80 m/s	12200 rpm	CS 570	star shaped hole	25	204093
125 x 22	⊗ 30	50	80 m/s	12200 rpm	CS 570	star shaped hole	25	204094
125 x 22	⊗ 30	60	80 m/s	12200 rpm	CS 570	star shaped hole	25	204095
125 x 22	⊗ 30	80	80 m/s	12200 rpm	CS 570	star shaped hole	25	204096
125 x 22	⊗ 30	100	80 m/s	12200 rpm	CS 570	star shaped hole	25	204097
125 x 22	⊗ 30	120	80 m/s	12200 rpm	CS 570	star shaped hole	25	204098
125 x 22	⊙ 10	36	80 m/s	12200 rpm	CS 570	round hole	25	204806
125 x 22	⊙ 10	60	80 m/s	12200 rpm	CS 570	round hole	25	204811
125 x 22	⊙ 10	80	80 m/s	12200 rpm	CS 570	round hole	25	204812
125 x 22	⊙ 10	120	80 m/s	12200 rpm	CS 570	round hole	25	204814
125 x 22	⊗ 30	40	80 m/s	12200 rpm	CS 570	star shaped hole	25	250259
180 x 22	⊗ 30	24	80 m/s	8500 rpm	CS 570	star shaped hole	25	204099
180 x 22	⊗ 30	36	80 m/s	8500 rpm	CS 570	star shaped hole	25	204100

### Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany

Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186

sales@klingspor.de - www.klingspor.de



Diameter x Hole in mm	Hole pattern	grain	Vmax m/s	Max. RPM	type of coat.abras.	bore shape	Packing unit/pcs.	Cat. number
180 x 22	⊕ 30	60	80 m/s	8500 rpm	CS 570	star shaped hole	25	204102
180 x 22	⊕ 30	80	80 m/s	8500 rpm	CS 570	star shaped hole	25	204103
180 x 22	⊕ 30	120	80 m/s	8500 rpm	CS 570	star shaped hole	25	204105
180 x 22	⊕ 30	40	80 m/s	8500 rpm	CS 570	star shaped hole	25	250260

**Klingspor Schleifsysteme GmbH und Co. KG**

Hüttenstraße 36 - 35708 Haiger - Germany

Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186

sales@klingspor.de - www.klingspor.de

