

Good. Safe. Yellow.

AN 400

The new Klingspor abrasive screen disc for aggressive and dust-free sanding



Application


Materials

- ▶ Paint/varnish/filler
- ▶ Gel coats
- ▶ Plaster, plasterboard walls
- ▶ Composite materials
- ▶ Wood, wood-based materials


Applications

- ▶ Intermediate and finishing of paint/varnish/filler, composite materials and gel coats
- ▶ Sanding of filled joints and drywall panels
- ▶ Effective sanding of hard and soft wood-based materials

Machines

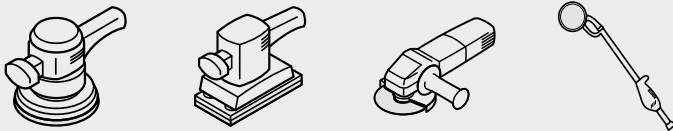


Product advantages

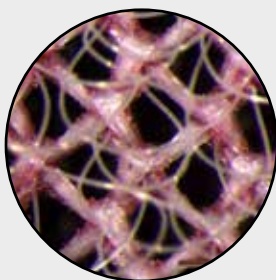

Rear side

- ✓ Extremely tear-resistant and flexible polyester cloth

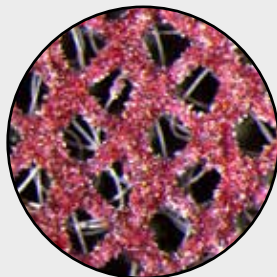

Grain side

- ✓ Effective and full-surface extraction thanks to open lattice structure

- ✓ No clogging of the disc



Target groups

- ▶ Carpenters/joiners
- ▶ Wood processing industry
- ▶ Drywall installations
- ▶ Automotive
- ▶ Boat construction
- ▶ Wind energy industry



Your advantages

Excellent process reliability

- ▶ No tearing of the disc, even under high loads
- ▶ Ideal for finish sanding and sanding of contours

Superbly smooth sanding

- ▶ Almost dust-free operation
- ▶ Independent of existing hole systems
- ▶ Improved occupational safety thanks to reduced dust formation


Exceptional service life

- ▶ No clogging
- ▶ No sanding marks caused by accumulation of dust particles

Abrasive screen, self-fastening

NEW

AN 400



Properties

Grain Aluminium oxide

Applications

Paint/Varnish/Filler	●	Composite materials	●
Gel coats	●	Wood	●
Plaster	●	Wood based materials	●
Plasterboard walls	●		

Advantages: Effective and full-surface dust extraction thanks to open lattice structure - Dust-free sanding extends the service life of the abrasive - Improved health and safety due to reduced dust formation at the work station - Independent of existing extraction hole patterns

Available grits:

Diameter in mm	Grit	Packing unit/pcs.	Cat. number
125	80	50	337898
125	100	50	337899
125	120	50	337900
125	150	50	337901
125	180	50	337905
125	240	50	337904
125	320	50	337903
125	400	50	337902
150	80	50	337886
150	100	50	337887
150	120	50	337885
150	150	50	337884
150	180	50	337883
150	240	50	337888
150	320	50	337876
150	400	50	337877
225	80	25	337871
225	100	25	337875
225	120	25	337873
225	150	25	337874
225	180	25	337872
225	240	25	337878

Abrasive screen, self-fastening

NEW

AN 400



Properties

Grain Aluminium oxide

Applications

Paint/Varnish/Filler	●	Composite materials	●
Gel coats	●	Wood	●
Plaster	●	Wood based materials	●
Plasterboard walls	●		

Advantages: Effective and full-surface dust extraction thanks to open lattice structure - Dust-free sanding extends the service life of the abrasive - Improved health and safety due to reduced dust formation at the work station - Independent of existing extraction hole patterns

Available grits:

Width x Length in mm	Grit	Packing unit/pcs.	Cat. number
80 x 133	80	50	337892
80 x 133	100	50	337891
80 x 133	120	50	337890
80 x 133	150	50	337894
80 x 133	180	50	337889
80 x 133	240	50	337893
80 x 133	320	50	337895
80 x 133	400	50	337896

